

## DETACHABLE CONTAINER SYSTEM ARM-ROLL

ARM-ROLL has a steel arm to load and unload a container.  
Since the arm directly holds the container, ARM-ROLL assures outstanding stability  
in loading and unloading operations.




▲CCA 44

### Features

\* Photographs on this catalog may include optional equipment and may differ from the vehicle delivered.

- Various types of container are applicable.
- Powerful twin lift cylinders are employed.
- Remote control switch allows safety operation.

### Operation sequence

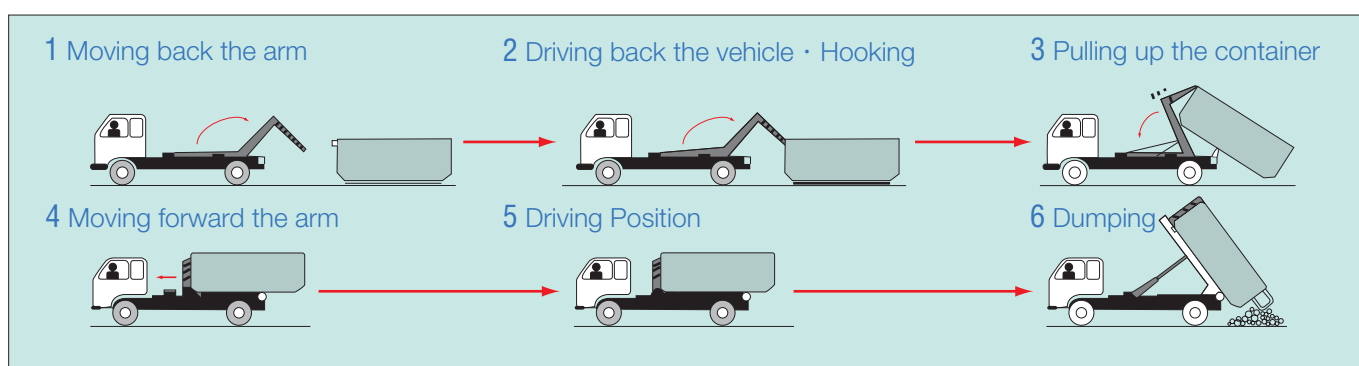

CCA22



CCA44



▲ Remote control switch


CCA1010



## Various containers can be loaded on ARM-ROLL.



▲ Closed type for garbage

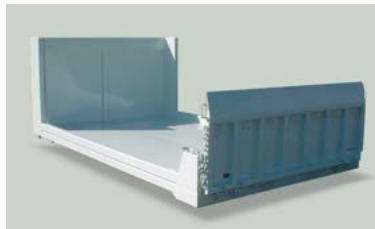

▲ Flat deck type for heavy construction machinery

## Specifications

Model			CCA22	CCA44	CCA77	CCA88	CCA1010
Max. lifting capacity including container (Approx.)			3,000kg	6,000kg	9,000kg	12,000kg	15,000kg
Open top container	Dimensions (Inside)	L.	2,730 mm	3,600 mm	4,000 mm	4,800 mm	5,900 mm
		W.	1,570 mm	1,900 mm	2,100 mm	2,300 mm	2,300 mm
		H.	850 mm	1,200 mm	1,400 mm	1,400 mm	1,600 mm
	Capacity	3.6 m <sup>3</sup>	8.1 m <sup>3</sup>	11.7 m <sup>3</sup>	15.4 m <sup>3</sup>	21.6 m <sup>3</sup>	
Closed container	Dimensions (Inside)	L.	2,730 mm	3,600 mm	4,000 mm	4,800 mm	5,900 mm
		W.	1,600 mm	2,000 mm	2,100 mm	2,260 mm	2,260 mm
		H.	1,050 mm	1,600 mm	1,700 mm	1,700 mm	1,800 mm
	Capacity	4.0 m <sup>3</sup>	10.0 m <sup>3</sup>	13.3 m <sup>3</sup>	16.5 m <sup>3</sup>	22.0 m <sup>3</sup>	
GVW			5,000~6,000kg	8,000~11,000kg	11,000~14,200kg	15,000~17,000kg	19,000~29,000kg
Recommendable wheelbase			2,500~2,800mm	3,800~4,200mm	3,800~4,200mm	4,500~5,000mm	5,600~6,000mm

The above mentioned figures are approximate.

- \* Optional equipment are included in these photographs.
- \* Specifications and dimensions are subject to change without notice.

## ShinMaywa Industries, Ltd.

International Sales Dept.  
Special Purpose Truck Div.

3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan

Telephone : +81-45-575-5163

Facsimile : +81-45-575-9837

e-mail : overseas@shinmaywa.co.jp

<http://www.shinmaywa.co.jp>