




UPPER FLOOR PLAN S = 1/100

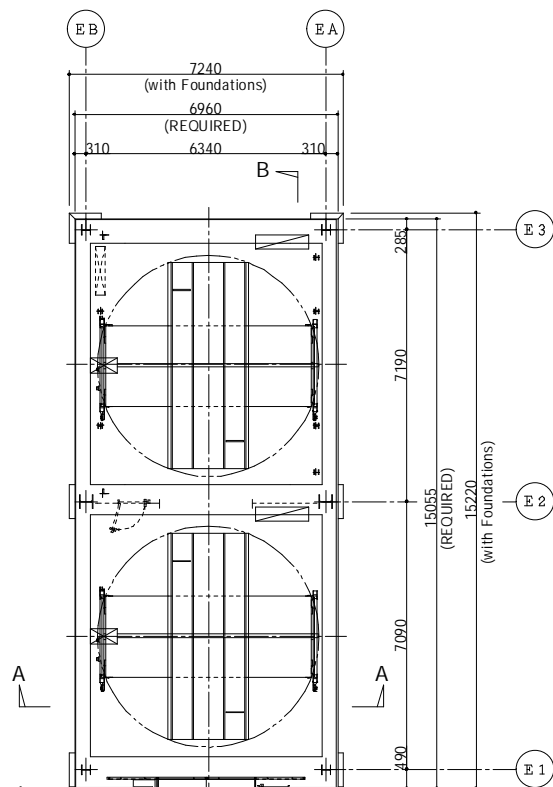

ENTRANCE-FLOOR (EL) LAYOUT PLAN S = 1/100

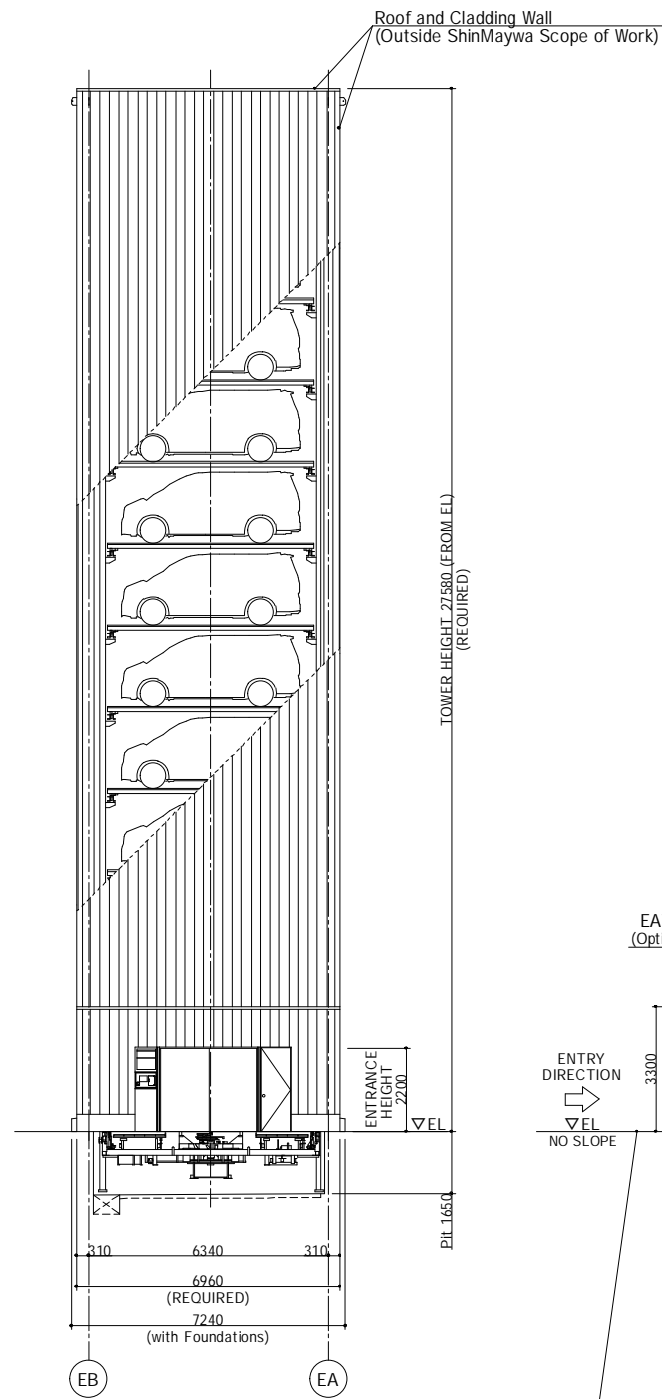

A-A SECTION S = 1/100

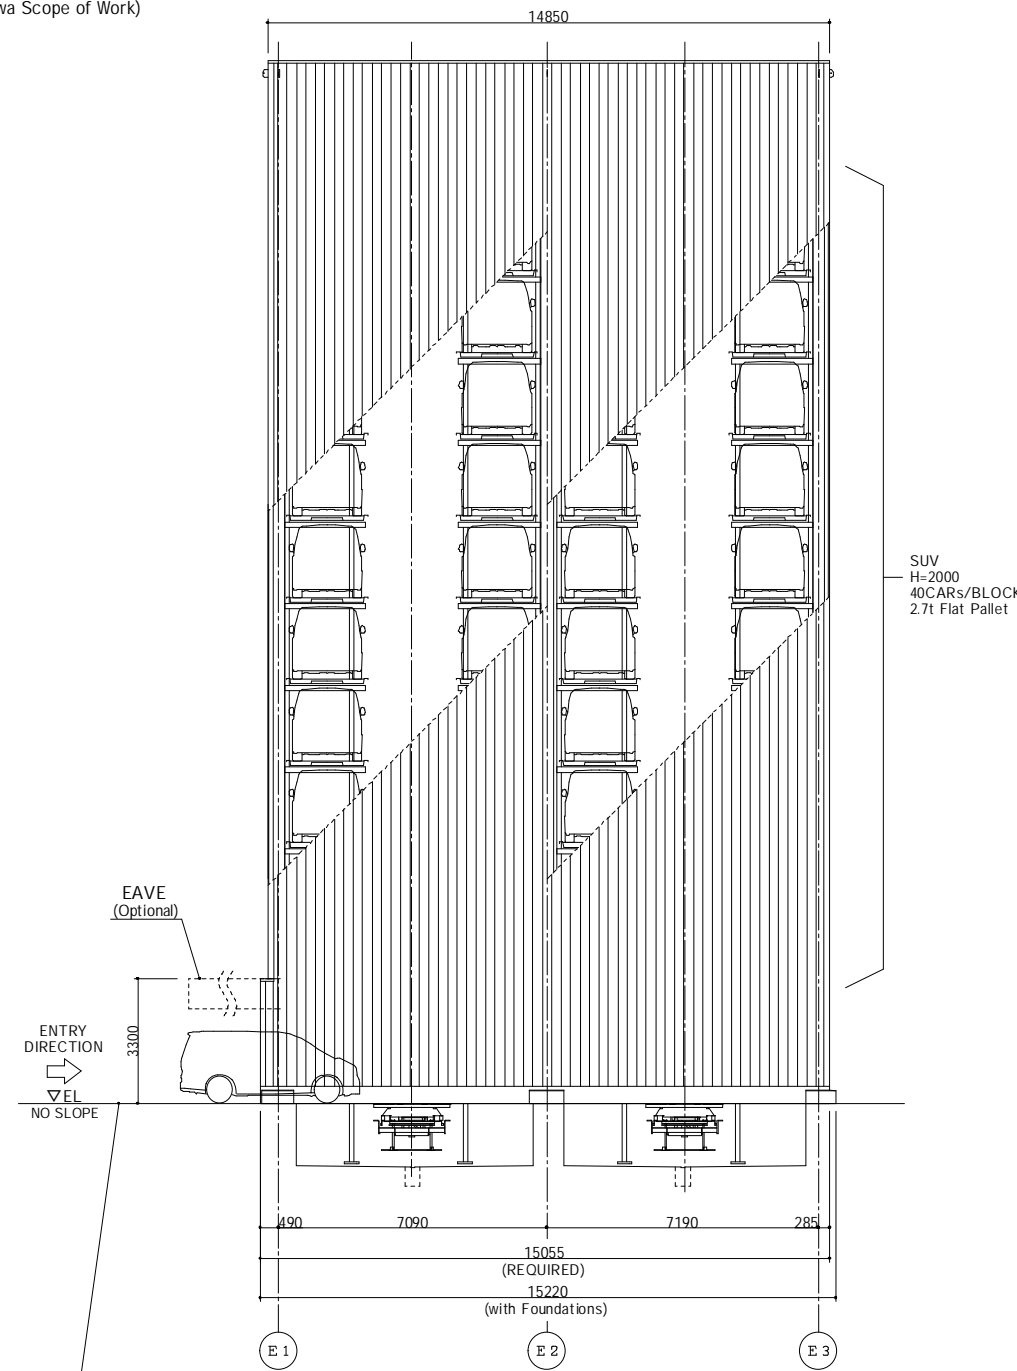

B-B SECTION S = 1/100

The driveway level in front of the Tower Parking must be the same as the entrance floor. Slope can cause undercarriage collision and damage.

PRODUCT SPECIFICATION	
NAME	ELEPARK (Elevator Type Parking System)
MODEL	EW2AXH-20T1*AXH-20T1-EHP(H40)
CAPACITY	TOTAL: 40 CARS /BLOCK
	SUV 40 CARS /BLOCK
<b>CAR DIMENSION</b>	
MAX. LENGTH	5300mm
MAX. WIDTH	2050mm*
MAX. HEIGHT	2000mm
MAX. WEIGHT	2700kg
TIRE OUTER DIMENSION	2050mm
MIN. GROUND CLEARANCE	90mm
*Side-view mirrors must be folded	
<p>&lt;Caution&gt;</p> <ol style="list-style-type: none"> <li>Cars with protruding parts or accessories cannot be stored.</li> <li>Be sure to fold the side-view mirrors when parking.</li> </ol>	
DIRECTION	FORWARD ENTRY, FORWARD EXIT
OPERATION METHOD	SMART CARD, TOUCHSCREEN
POWER SUPPLY CAPACITY	128 kVA /BLOCK (TOTAL HEIGHT ≤ 46.05m)
<b>POWER</b>	
ASCENT AND DESCENT	AC3φ 200V 37 kW x 2/BLOCK
SLIDE AND ROTATE	1.1 kW x 2/BLOCK
LIFT	3.7 kW x 2/BLOCK
CONTROL	VECTOR INVERTER
<b>SPEED</b>	
ASCENT AND DESCENT	120m/min
SLIDE	40m/min
ROTATION	5.6 rpm
<b>LIGHTING</b>	
GROUND FLOOR: LED TUBE x 8/BLOCK	
UPPER FLOOR: MAINTENANCE LIGHTS	
<b>AUTO DOOR</b>	
SYSTEM	2 PANELS CENTER-OPEN SLIDING DOOR/BLOCK
DIMENSION	WIDTH: 2550mm x HEIGHT: 2200mm
MATERIAL	STEEL (COATING FINISHING)

<NOTE>  
 1) Specifications are based on Japan Standard or ShinMaywa Standard.  
 2) This is the concept drawing for reference use only.  
 Please contact us for further information and optional specification (eave length etc.)  
 3) A transformer must be installed for use with local power grid.  
 (Outside ShinMaywa scope of work)

ShinMaywa  
**REFERENCE DRAWING**  
 Recommended Use:  
 HEAVY SUV, SUPERCAR  
 CAD\_EW2AXH-20T1AXH-20T1-EHP(H40)