

## DETACHABLE CONTAINER SYSTEM **MULTI-LOADER**


MULTI-LOADER has two steel arms which rotate to load and unload a container. Since the container is loaded and unloaded in a level position, there is practically no possibility of the cargo capsizing during loading. MULTI-LOADER is most suitable for loading and unloading small to large sized containers. It can be used to transport refuse, scrap and other material. Material inside the container can be discharged to the rear, by tilting the container using rear dumping hook.



### ■ Features

- Various types of container are applicable.
- Simple structure, simple operation

## Operation sequence

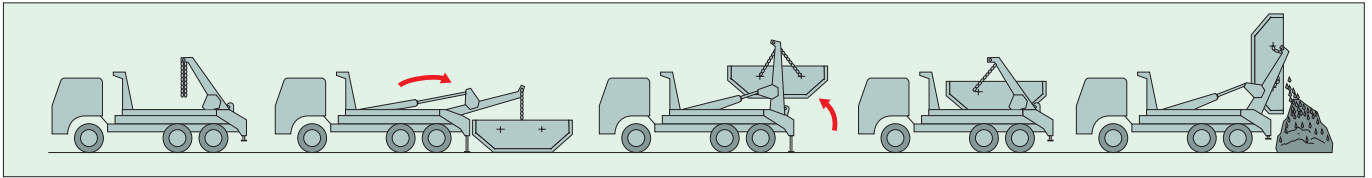

▲ Putting chains to hooks of the container



▲ Hanging the container in a level position



▲ Completion to load the container

## Specifications

Model		CCM4	CCM8	CCM10	
Max.loading capacity including container		5,000kg	10,000kg	15,000kg	
Open top container	Dimensions				
	(Inside)	L.	3,800 mm	3,800 mm	4,300 mm
		W.	1,550 mm	1,550 mm	1,550 mm
		H.	1,000 mm	1,500 mm	1,750 mm
Capacity		5 m <sup>3</sup>	8 m <sup>3</sup>	10 m <sup>3</sup>	
Weight		750 kg	1,000 kg	1,200 kg	
GVW		8,000~11,000 kg	15,000~17,000 kg	19,000~26,000 kg	
Recommendable wheelbase		3,600~3,800 mm	3,700~4,300 mm	4,500~5,000 mm	

The above mentioned figures are approximate.

\* Optional equipment are included in these photographs.

\* Specifications and dimensions are subject to change without notice.

## ShinMaywa Industries, Ltd.

International Sales Dept.  
Special Purpose Truck Div.

3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan

Telephone : +81-45-575-5163

Facsimile : +81-45-575-9837

e-mail : overseas@shinmaywa.co.jp

<http://www.shinmaywa.co.jp>