




UPPER FLOOR PLAN S = 1/100

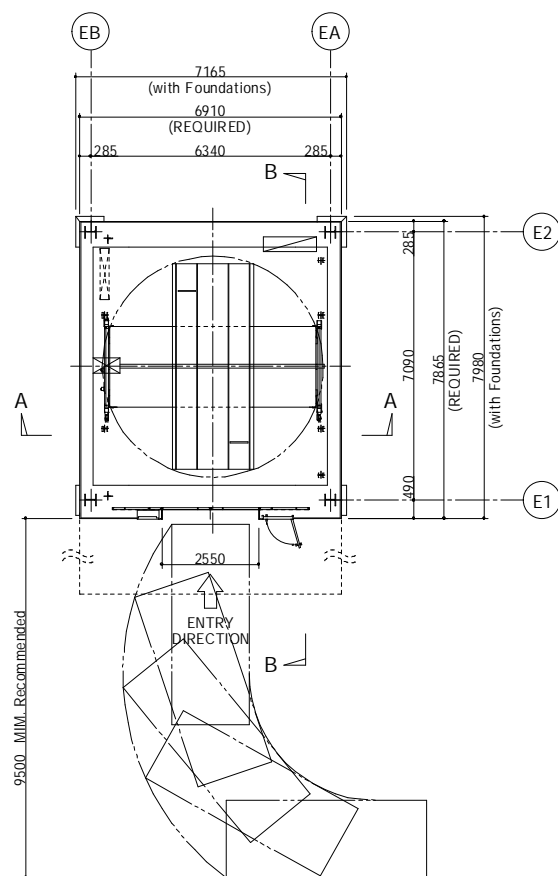

ENTRANCE-FLOOR (EL)LAYOUT PLAN S = 1/100

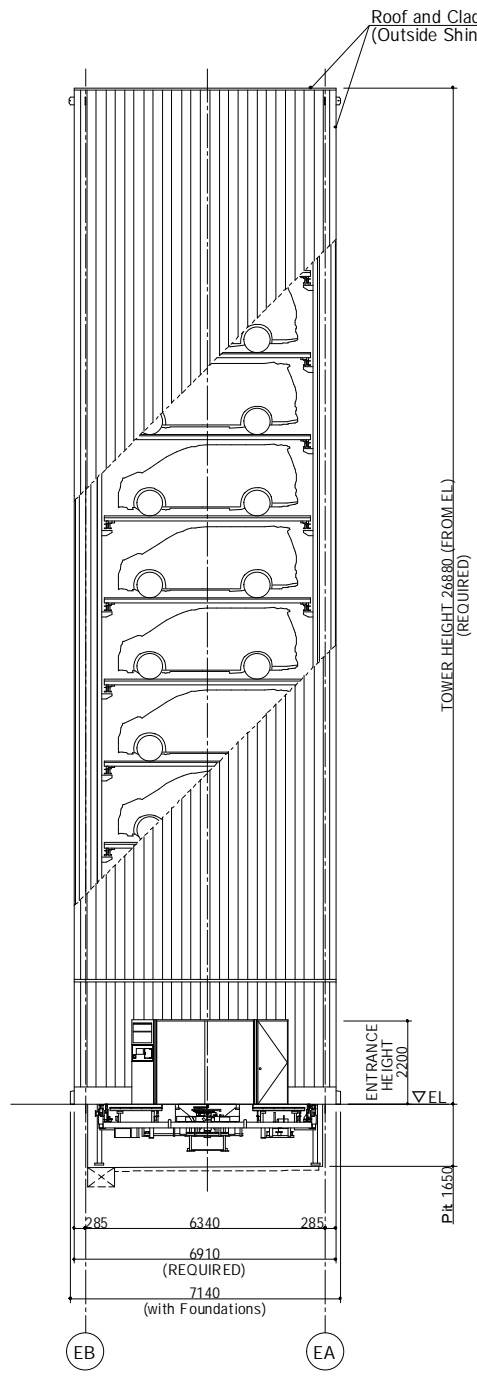

A-A SECTION S = 1/100

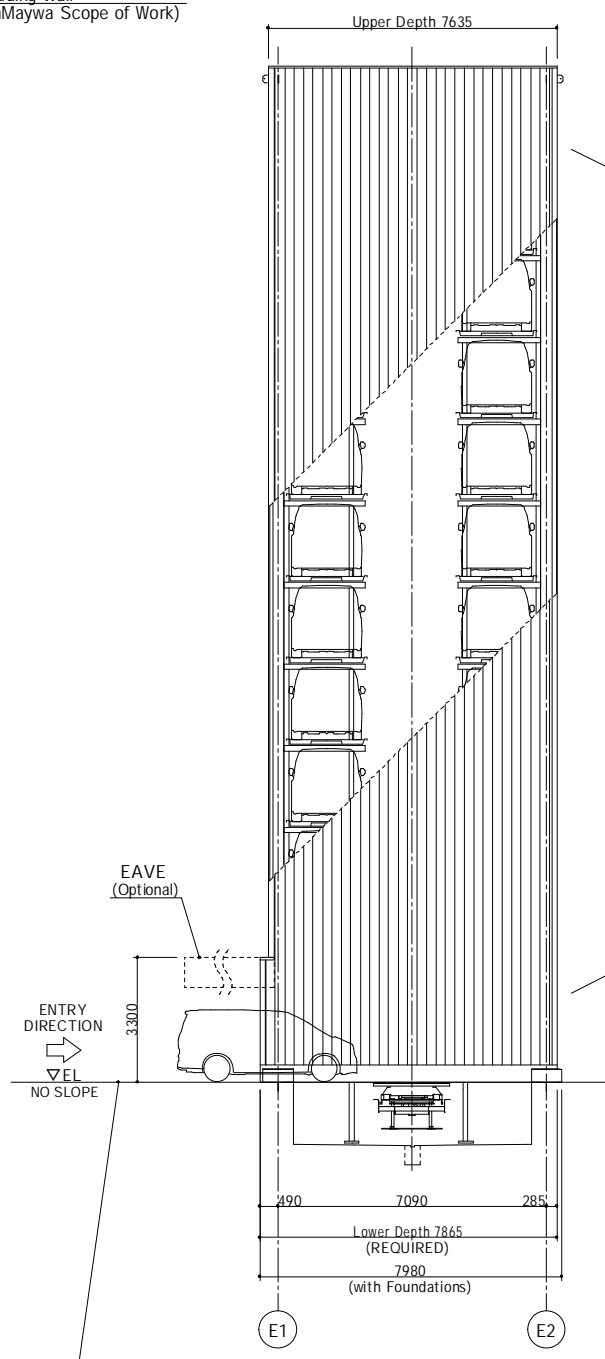

B-B SECTION S = 1/100

The driveway level in front of the Tower Parking must be the same as the entrance floor. Slope can cause undercarriage collision and damage.

PRODUCT SPECIFICATION	
NAME	ELEPARK (Elevator Type Parking System)
MODEL	ET2AXH-20T1-EHP(H20)
CAPACITY	TOTAL: 20 CARS /BLOCK
	SUV 20 CARS /BLOCK
CAR DIMENSION	
MAX. LENGTH	5300mm
MAX. WIDTH	2050mm*
MAX. HEIGHT	2000mm
MAX. WEIGHT	2700kg
TIRE OUTER DIMENSION	2050mm
MIN. GROUND CLEARANCE	90mm
*Side-view mirrors must be folded	
Side-view Mirrors folded	MAX. WIDTH
TIRE OUTER DIMENSION	MAX. LENGTH
	MIN. GROUND CLEARANCE
	MAX. HEIGHT
Protruding Front mirrors	Antennas
Protruding Accessories	Cargo on top
	Protruding Rear mirrors
	Protruding Mufflers or hooks
<Caution>	
1. Cars with protruding parts or accessories cannot be stored.	
2. Be sure to fold the side-view mirrors when parking.	
DIRECTION	FORWARD ENTRY, FORWARD EXIT
OPERATION METHOD	SMART CARD, TOUCHSCREEN
POWER SUPPLY CAPACITY	64 kVA /BLOCK (TOTAL HEIGHT ≤ 46.05m)
POWER	
ASCENT AND DESCENT	AC3φ 200V 37 kW /BLOCK
SLIDE AND ROTATE	1.1 kW /BLOCK
LIFT	3.7 kW /BLOCK
CONTROL	
VECTOR INVERTER	
SPEED	
ASCENT AND DESCENT	120m/min
SLIDE	40m/min
ROTATION	5.6 rpm
LIGHTING	
GROUND FLOOR: LED TUBE x 4/BLOCK	
UPPER FLOOR: MAINTENANCE LIGHTS	
AUTO DOOR	
2 PANELS CENTER-OPEN SLIDING DOOR/BLOCK	
SYSTEM	WIDTH: 2550mm x HEIGHT: 2200mm
DIMENSION	
MATERIAL	STEEL (COATING FINISHING)

SUV H=2000 20CARS/BLOCK 2.7t FLAT PALLET

<NOTE>  
 1) Specifications are based on Japan Standard or ShinMaywa Standard.  
 2) This is the concept drawing for reference use only.  
 Please contact us for further information and optional specification. (eave length etc.)  
 3) A transformer must be installed for use with local power grid.  
 (Outside ShinMaywa scope of work)

**ShinMaywa**  
**REFERENCE DRAWING**  
 Recommended Use:  
 HEAVY SUV, SUPERCAR  
 CAD\_ET2AXH-20T1-EHP(H20)